Technical Sheet

CLIP
Clip

Replacement clip for QDPRO64

Features

Material

- Acier galvanisé DX51D + Z275 suivant NF EN 10346.

Benefits

- Quick and easy to use,
- Teeth to hold the clip firmly on the tongue,
- Offset tip hole for easy nailing,
- oblong holes for staple widths from 6 to 16 mm.

Applications


Header member

- **Porteur :** tasseaux, panneaux bois...
- **Porté :** tous types de lambris rainurés...

For Use With

- Fixation de lambris.



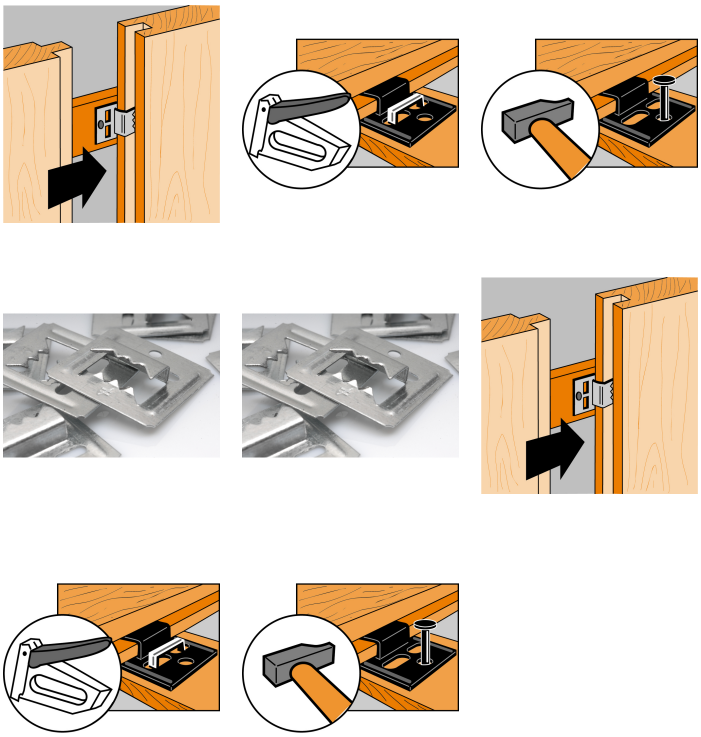



Technical Sheet

CLIP
Clip

Technical Data

Dimensions





Reference	Connector Dimensions					Decking capacity					
	Other	Product Dimensions[mm]					Fasteners (2)		C18 timber		Other
	Weight[kg]	A[mm]	A[mm]	E1[mm]	E[mm]	Number of Fasteners	Oblong pierced staples Ø2,5x6	Tip assemblies 2.5 mm diameter holes	Largeur[mm]	Density[u/m²]	Maximum spacing between joists[cm]
CLIP2/250	0.003	24	0.4	24	2	-	N°4 L = 6 - 15mm	1 - Ø1.5x20	70	35	40
CLIP3/250	0.003	24	0.4	24	3	-	N°4 L = 6 - 15mm	1 - Ø1.5x20	70	35	40
CLIP4/250	0.004	25	0.6	25	4	-	N°4 L = 6 - 15mm	1 - Ø1.5x20	70	35	40
CLIP5/250	0.004	25	0.6	25	5	-	N°4 L = 6 - 15mm	1 - Ø1.5x20	70	35	40


Installation


Fixing


- Pointes Ø1,5 x 20 mm (fournies avec les clips).
- Agrafes largeur 6 à 15 mm.

Installation

1. Position the clips on the cleats.
2. Fix the clips to the battens using the nails supplied or staples.
3. Insert the groove of the panelling boards under the tongue of the clips.







Copyright by Simpson Strong-Tie®