


Technical Sheet


CLR Plus SK
Countersunk Concrete Screws

The countersunk head is often used when the screw must remain flush with the object to be fixed, for aesthetical reasons or to avoid intereferences above it.

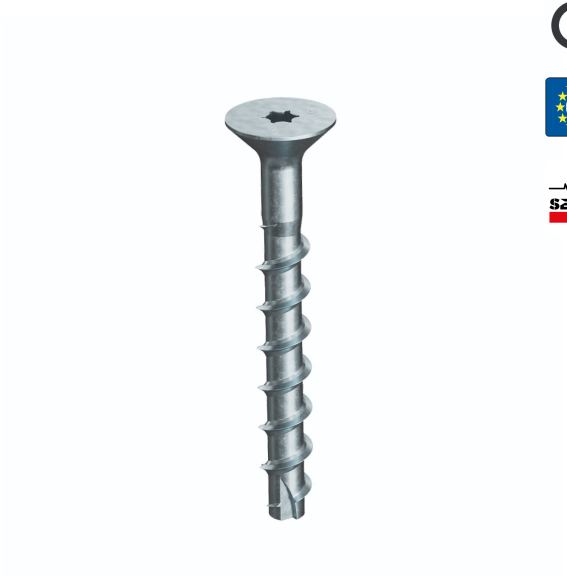







Applications

Material

- Electro-galvanized steel

Suitable on

- Cracked and uncracked concrete

Technical Data

Product dimensions

Reference	Metallic fixings dimensions						
	Item code	Other					Product Dimensions[mm]
		Hole diameter [d_o][mm]	Fixing thickness (tfix) for reduced embedment depth (hef,r)	Fixture thickness [tfi_x] (1)[mm]	Fixing thickness (tfix) for increased embedment depth (hef,max)	Qty per box[pcs]	Dim[mm]
CLR Plus SK 5x40	72107B0504000	5	5	-	-	100.0	5x40
CLR Plus SK 5x60	72107B0506000	5	25	-	-	100.0	5x60
CLR Plus SK 6x40	72107B0604000	6	5	-	-	100.0	6x40
CLR Plus SK 6x60	72107B0606000	6	25	20	5	100.0	6x60
CLR Plus SK 6x80	72107B0608000	6	45	40	25	100.0	6x80
CLR Plus SK 8x80	72107B0808000	8	35	25	15	50.0	8x80
CLR Plus SK 8x100	72107B0810000	8	55	45	35	50.0	8x100
CLR Plus SK 10x90	72107B1009000	10	35	15	5	50.0	10x90
CLR Plus SK 10x100	72107B1010000	10	45	25	15	50.0	10x100

Copyright by Simpson Strong-Tie®