
Technical Sheet

DWF
Drywall to Steel Screw

The DWF screw has been designed to fix drywall to light gauge steel (0.6 - 0.9 mm thick). The sharp point allows for faster drilling whilst the bugle head provides a neat finish in the drywall. The DWF has a fine thread and is CE marked to EN14566. It has grey phosphate coating and is suitable for use indoors.



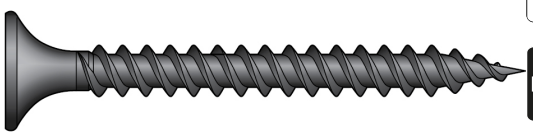

Features

Material

- Steel - Grey phosphate coating

Benefits

- CE marked to EN14566
- Bugle haed
- Sharp point
- Fine thread
- PH2 driver bits included

Applications

Support

- Suitable for fixing to 0.6 - 0.9 mm steel

Common Applications

- Drywall to steel

Technical Sheet

DWF
Drywall to Steel Screw

SIMPSON Strong-Tie

Technical Data



Product Dimensions

Reference	Fasteners Dimensions			
	Other	Product Dimensions[mm]		QD information
	Screws qty per box	Thread diameter[mm]	l[mm]	Screws qty per strip
DWF3925PE	2500.0	3.9	25	30.0
DWF3930PE	2500.0	3.9	30	30.0
DWF3935PE	2500.0	3.9	35	30.0
DWF3940PE	2500.0	3.9	40	30.0
DWF3945PE	2000.0	3.9	45	30.0



Product Dimensions UK

Reference	Fasteners Dimensions									
	Product Dimensions[mm]					QD information			Other	
	Ø Head[mm]	Thread diameter[mm]	l[mm]	d1[mm]	Thread length[mm]	Screws qty per strip	Max. rotation speed[tr/min]	Compatible device	Screws qty per box	Weight[kg]
DWF3925PE	8.1	3.9	25	2.4	19.5	30.0	2500 - 6000	QDPRO51E / QD76KE	2500.0	0.002
DWF3930PE	8.1	3.9	30	2.4	24.5	30.0	2500 - 6000	QDPRO51E / QD76KE	2500.0	0.002
DWF3935PE	8.1	3.9	35	2.4	29.5	30.0	2500 - 6000	QDPRO51E / QD76KE	2500.0	0.002
DWF3940PE	8.1	3.9	40	2.4	34.5	30.0	2500 - 6000	QDPRO51E / QD76KE	2500.0	0.002
DWF3945PE	8.1	3.9	45	2.4	39.5	30.0	2500 - 6000	QDPRO51E / QD76KE	2000.0	0.003

DWF
Drywall to Steel Screw

Options





Single Thread



Tapered tip

Copyright by Simpson Strong-Tie®