
Technical Sheet

DWFSD
DRYWALL to Steel Screw

DWFSD is a self drilling screw with a fine thread, designed to fix drywall panels to steel of thicknesses 1.2 mm to 2.2 mm.





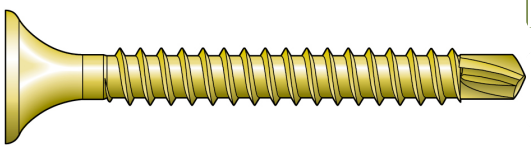



Features

Material

- Steel - yellow zinc plated

Benefits

- CE marked to EN14566
- Bugle haed
- Drill point
- Fine thread
- PH2 driver bits included (BIT2PE)

Applications

Support

- Suitable for fixing to 1.2 - 2.2 mm steel


Common Applications

- Fixing drywall board to steel

Technical Sheet


DWFSD
DRYWALL to Steel Screw

Technical Data



Dimensions and caracteristics values

Reference	Fasteners Dimensions						
	Product Dimensions[mm]		QD information			Other	
	Ø Head[mm]	l[mm]	Screws qty per strip	Compatible device	Max. rotation speed[tr/min]	Screws qty per box	Weight[kg]
DWFSD32PE	8.2	32	30.0	QDPRO51E / QD76KE	2500	2500.0	0.002
DWFSD41PE	8.2	41	30.0	QDPRO51E / QD76KE	2500	2500.0	0.003



Product Dimensions UK

Product Dimensions UK
See full table online ➡️

Reference	Ø Head[mm]											Compatible device	Other: Screws qty per box	Other: We
DWFSD32PE	8.2	3.5	32	-	-	-	-	-	-	30.0	2500	QDPRO51E / QD76KE	2500.0	

DWFSD
DRYWALL to Steel Screw

Options





Fine Thread



Drill Point

Copyright by Simpson Strong-Tie®