

Technical Sheet

FLV
Flat connectors FLV

FLV flat connectors are designed for quick and easy connection in construction. Various holes allow the use of larger nails and screws.

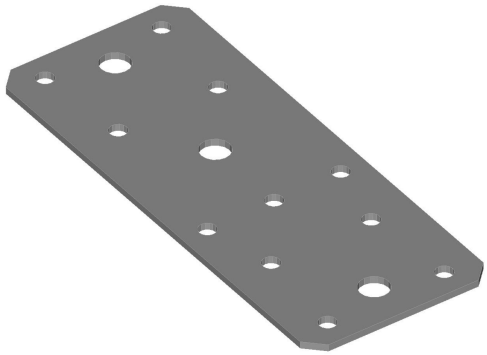



Features

Material

Steel quality:
S 250 GD + Z 275 according to DIN EN 10346

Corrosion protection:
275 g / m galvanized on both sides 20mm

Benefits

- **Various holes allow the use of larger nails and screws**

Applications

Applicatons

- Wood, wood products, concrete, steel


Scope

- **FLV Flat connectors are used where there is no need for a structural analysis.**

Technical Sheet

FLV
Flat connectors FLV

Technical Data



Dimensions and drill holes

Reference	Connector Dimensions				
	Product Dimensions[mm]			Holes[mm]	Other
	A[mm]	B[mm]	Thickness[mm]	Ø	Weight[kg]
FLV40/100	40	100	2.5	5 ; 11	0.08
FLV40/180	40	180	3	5 ; 11	0.17
FLV55/135	55	135	2	5 ; 8.5	0.12

Installation

Fasteners

- **FLV flat connectors are mounted CNA4,0xl nails or screws CSA5,0xl**

Copyright by Simpson Strong-Tie®