
Technical Sheet

A35E
Framing Anchors

The A35E anchor's exclusive bending slot allows instant, accurate bending on site for all two and three-way connections.
• Balanced, completely reversible design allows the A35E to be used to secure a wide variety of connections.

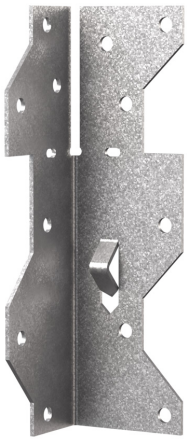

Features

Material

- Pre-galvanised mild steel.


Benefits


- Speed prong holds framing anchor in position to allow easier nailing,
- Exclusive bending slots allow instant, accurate bending on site for all two and three-way ties.
- Balanced, completely reversible design allows the A35 to be used for a wide variety of connections.

Applications

Suitable On

- Wood to wood applications.

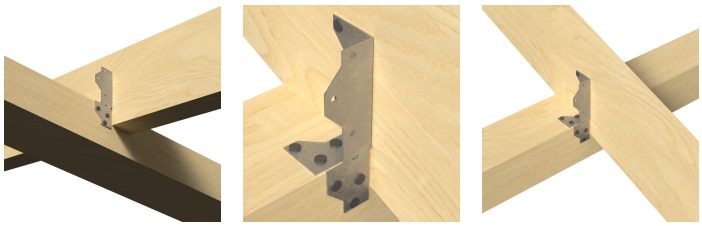


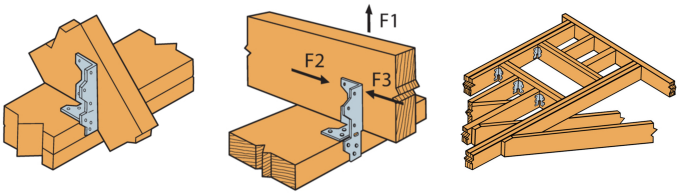


A35


A35


A35

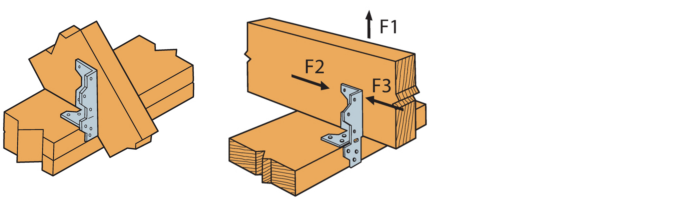



Technical Sheet

A35E
Framing Anchors

Technical Data


Product Dimensions





Reference	Connector Dimensions									
	Product Dimensions[mm]					Joist		Flange B		Other
	A[mm]	B[mm]	C[mm]	E[mm]	t[mm]	Round Ø3.8	Obround Ø2.4x4.8	Round Ø3.8	Obround Ø2.4x4.8	Weight[kg]
A35E	33	33	114	39	1.2	6	1	6	1	0.07

Product capacities - Timber to timber - Full nailing - 2 brackets



Reference	Ties capacity			
	Product Characteristic capacities - Timber to timber - Full nailing			
	Characteristic capacity - Timber C24 2 connectors[kN]			
	$R_{1,k}$		$R_{2,k}=R_{3,k}$	
	CNA3.1x35	N3.75x30	CNA3.1x35	N3.75x30
A35E	4.6	1.3	3.1	0.89


Installation


Fixing


Install with 3.75X30mm square twist nails.


Installation


Use all specified fasteners














Copyright by Simpson Strong-Tie®