


# Technical Sheet


66L
**L bracket 66L**


Cost-effective solution for positioning against a shifting girders and beams.

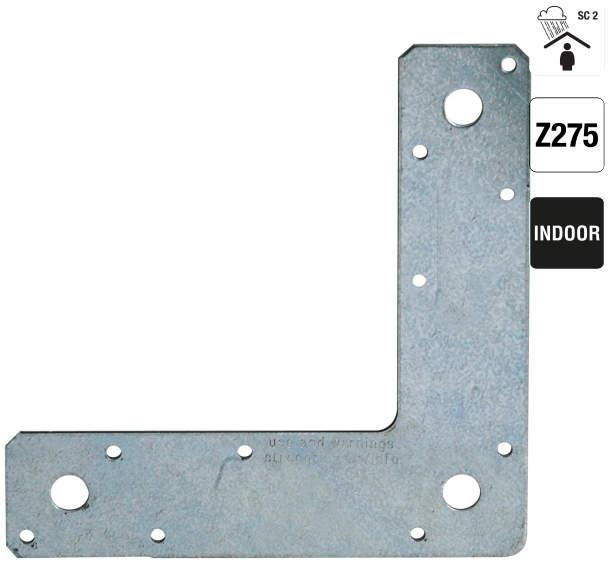







## Features

### Material

**Steel quality:**

**S 250 GD + Z 275 according to DIN EN**

**Corrosion protection:**

**275 g / m galvanized on both sides 20mm**

### Benefits

- **Cost-effective solution for positioning against a shifting girders and beams.**

## Applications

### Header member

**Wood, wood products**

### For Use With


- **Designed for home and garden**


# Technical Sheet

66L
**L bracket 66L**

## Technical Data

### Dimensions






| Reference | Connector Dimensions | | | | | | |
|---|---|---|---|---|---|---|---|
| | Product Dimensions[mm] | | | | Holes[mm] | | Other |
| | A[mm] | B[mm] | C[mm] | Thickness[mm] | Nb. | Ø | Weight[kg] |
| 66L | 38 | 150 | 150 | 2 | 10.0 | Ø4 + 3 Ø11 | 0.15 |


# Installation

## Fixing

- **Connection to the timber is made CNA nails or screws Ø 10th**

## Installation

1. Approcher l'élément à fixer du support.
2. Pointer la ferrure sur l'élément à fixer.
3. Pointer la ferrure sur le support bois.





Copyright by Simpson Strong-Tie®