
Technical Sheet

FSB Protec

Wafer Head Steel Screw - Drill Point

Used to fix external board materials such as plasterboard and fibrecement board to steel joists up to 2.0mm in thickness.



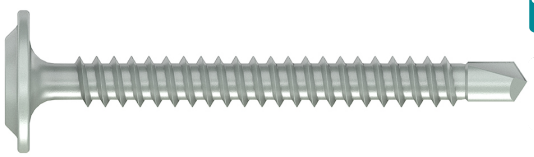

Features

Features

- Cross point drive.
- Wafer head.
- Drill point.
- Metal tapping thread.
- Electrogalvanised coating.
- Protec coating option.


Applications

Suitable For

- Steel to steel.
- Fibre cement board to steel.
- Wood Fibre board to steel.

FSB Protec
Wafer Head Steel Screw - Drill Point

Technical Data



Product dimensions

Reference	Fasteners Dimensions									
	Item Code	Other				Product Dimensions[mm]				
		Tun / DB nr.	NOB nr.	Box Quantity	Weight[kg]	d[mm]	l[mm]	d_h[mm]	d1[mm]	bit[mm]
FSB4.2X13 PROTEC	74412	1949907	53293145	250	0.002	4.2	13	11.5	2.7	PH2
FSB4.2X25 PROTEC	74409	1949904	53293153	250	0.002	4.2	25	11.5	2.7	PH2
FSB4.2X32 PROTEC	74408	1949903	53293164	250	0.003	4.2	32	11.5	2.7	PH2

Copyright by Simpson Strong-Tie®