

Technical Sheet


GAR
Anti-rodent mesh

The Anti Rodent Mesh allow a good ventilation of the cladding and prevent rodent and insect from coming inside.



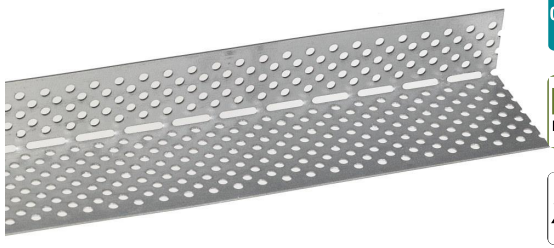





Features

Material

- Steel S250GD,
- Finish ZPRO.

Advantages

- Diameter of the holes are 3mm : it prevent most of the insect to enter,
- Mesh provided in 25m roller: stock and transportation is simplified, reduction of drop and overlap when in bars,
- Finish equivalent to stainless steel A2: good resistance to corrosion
- Conform to french standard DTU41.2 for ventilation.

Applications

Header member

- Solid timber, Engineered timber, glulam.


Intend of Use

- Timber frame,
- Cladding.

Technical Sheet

GAR
Anti-rodent mesh

Technical Data



Product dimensions

Reference	Connector Dimensions										
	Other				Product Dimensions[mm]					Holes[mm]	
	DB No.	NOB nr.	Packaging[mm]	Weight[kg]	Folded dimensions[mm]		Flat dimensions			Round	Oblong
					A[mm]	E1[mm]	Width[mm]	Total Length[mm]	Thickness[mm]		
GAR22/45/25	1865791	51166080	-	8	45	22	67	25	0.8	Ø 3	Ø 3 x 12
GAR25/42/25	1865792	51166095	-	8	42	25	67	25	0.8	Ø 3	Ø 3 x 12
GAR27/40/25	-	-	-	7.7	40	27	67	25	0.8	Ø 3	Ø 3 x 12
GAR30/70/25	-	-	-	11.5	70	30	100	25	0.8	Ø 3	Ø 3 x 12
GAR40/60/25	-	-	-	11.5	60	40	100	25	0.8	Ø 3	Ø 3 x 12

Opening areas of the mesh

Reference	Connector Dimensions			
	Flange B		Holes Flange C	
	Ratio d'ouverture[cm² / m]	Round	Ratio d'ouverture[cm² / m]	Round
		Dimensions and drill holes[mm]		Dimensions and drill holes[mm]
GAR22/45/25	113	45	58	22
GAR25/42/25	104	42	67	25
GAR27/40/25	102	40	68	27
GAR30/70/25	176	70	77	30
GAR40/60/25	148	60	105	40

Installation

How to choose


- **GAR22/45/25 :** for stud of 22mm or two 22mm **= 44mm**.
- **GAR25/42/25 :** for stud **25 mm** or **27 mm** or two studs **27+18 = 45 mm.**


Complementary notes

The Anti Rodent Mesh is packaged as 25m roller. It must be cut and folded in house or on site. The oblong holes correspond to the folded line. Gloves and glasses must be used to use this product.

Fasteners

The fasteners used to fix the GAR to the stud are CNA2.5x35





Copyright by Simpson Strong-Tie®